

White Paper

Fabasoft Folio Web Client Configuration Possibilities

Fabasoft Folio 2023 Update Rollup 2

Copyright © Fabasoft R&D GmbH, Linz, Austria, 2023.

All rights reserved. All hardware and software names used are registered trade names and/or registered trademarks of the respective manufacturers.

No rights to our software or our professional services, or results of our professional services, or other protected rights can be based on the handing over and presentation of these documents.

Contents

1 Introduction	4
2 Software Requirements	4
3 Mozilla Firefox	4
3.1 Pop-up Windows	4
3.2 Close Windows.....	5
4 Apple Safari	5
4.1 Pop-up Windows	5

1 Introduction

The Fabasoft Folio Web Client is accessed via a web browser. This white paper focuses on web browser settings that can be easily adjusted by users. For information about configuration tasks that should be carried out by system administrators consult the white paper "Fabasoft Folio Client".

2 Software Requirements

System environment: All information contained in this document implicitly assumes a Microsoft Windows environment.

Supported platforms: For detailed information on supported operating systems and software see the software product information on the Fabasoft distribution media.

Descriptions in this document are based on the following software:

- Microsoft Edge 115.0
- Google Chrome 115.0
- Mozilla Firefox 115.0
- Apple Safari 16.5

3 Mozilla Firefox

The following web browser settings can be carried out in Mozilla Firefox.


3.1 Pop-up Windows

Pop-up windows should be allowed, to avoid problems when opening new windows from the Fabasoft Folio Web Client (e.g. "Explore").


To allow pop-up windows, perform the following steps:

1. Open Mozilla Firefox.
2. On the "Tools" menu click "Options".

3. On the "Content" tab disable *Block pop-up windows* or click "Exceptions" and create an entry for the address of the Fabasoft Folio Web Client.

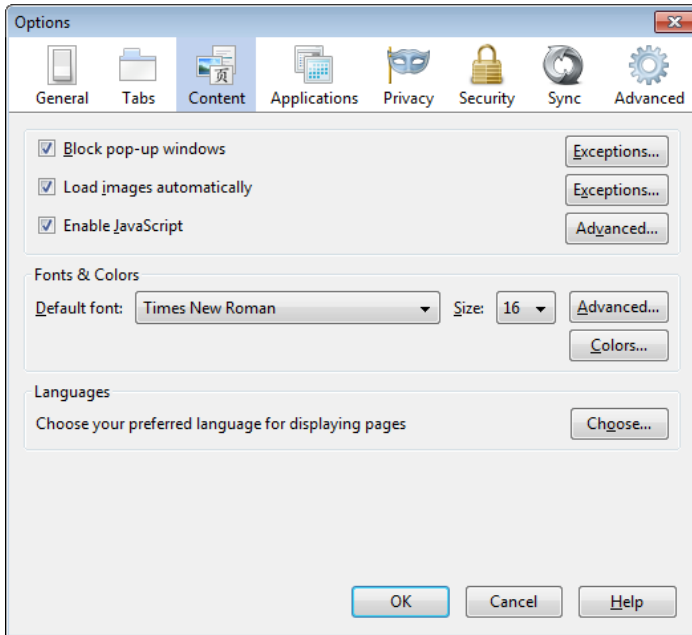

Note: If you want to open more than 20 pop-ups type `about:config` in the address bar, search for the entry `dom.popup_maximum` and define the desired value.

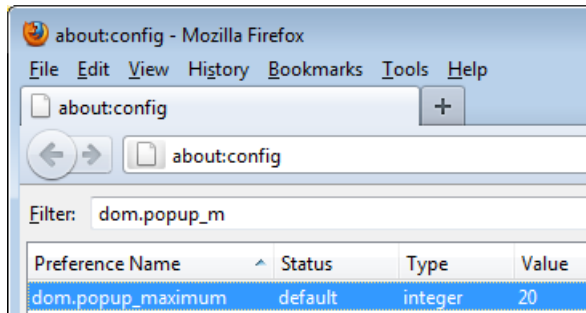

3.2 Close Windows

To allow scripts to close web browser windows (necessary for some use cases), type `about:config` in the address bar, search for the entry `dom.allow_scripts_to_close_windows` and set the value `true`.

4 Apple Safari

The following web browser settings can be carried out in Apple Safari.

4.1 Pop-up Windows

Pop-up windows should be allowed, to avoid problems when opening documents or images.

To configure this option select "Preferences" from the Safari menu, click the "Security" tab and disable the *Block pop-up windows* option.

