



White Paper

Installation and Configuration of Fabasoft iArchiveLink

Fabasoft Folio 2024 Update Rollup 1

Copyright © Fabasoft R&D GmbH, Linz, Austria, 2024.

All rights reserved. All hardware and software names used are registered trade names and/or registered trademarks of the respective manufacturers.

No rights to our software or our professional services, or results of our professional services, or other protected rights can be based on the handing over and presentation of these documents.

Contents

1 Introduction	4
2 Software Requirements	4
3 Installation of the Fabasoft iArchiveLink Service	4
4 Configuration of the SAP System	5
4.1 Output Device	5
4.2 Content Repository	7
4.3 Document Type	8
4.4 Link for Content Repository	8
4.5 Document Type Customizing Wizard	9
4.6 Configuration of the GUI Integration	12
4.7 Support of Two Archives	16
5 Importing Certificates	17
6 Enable HTTPS Connection Between SAP and the Fabasoft iArchiveLink Service	18
6.1 Enable HTTPS for the Fabasoft iArchiveLink Service	18
6.2 Add the Certificate Authority in SAP	19
6.3 Configure the Content Repository to Require HTTPS	19
7 Solution Manager Integration	20
7.1 SLD-Registration	20
7.2 Log and Configuration Files	21
8 Configuration of the Fabasoft Folio Domain	21
9 Checking the Installation	23
10 Client Configuration	25
11 Upgrade Steps for Fabasoft Folio 2016 and Lower	25

1 Introduction

This document describes the installation and configuration of Fabasoft iArchiveLink in a Microsoft Windows environment or Linux environment using an existing Fabasoft Folio Domain.

Fabasoft iArchiveLink provides a software product package, a setup for the installation of a system service and a setup for the installation of the SAP control stub.

2 Software Requirements

System environment: All information contained in this document implicitly assumes a Microsoft Windows or Linux environment.

Supported platforms: For detailed information on supported operating systems and software see the software product information on the Fabasoft distribution media.

Descriptions in this document are based on the following software:


- SAP ERP Central Component (ECC) 6.0 EHP 8
- Microsoft Visual C++ Redistributable 2019

3 Installation of the Fabasoft iArchiveLink Service

Fabasoft iArchiveLink can be installed on a dedicated server or on an existing Fabasoft Folio Web Server.

For upgrade Fabasoft Folio 2016 and lower to a newer Fabasoft Folio version see chapter 11 “Upgrade Steps for Fabasoft Folio 2016 and Lower”.

During the installation process of your Fabasoft product, additionally select *Fabasoft iArchiveLink*.

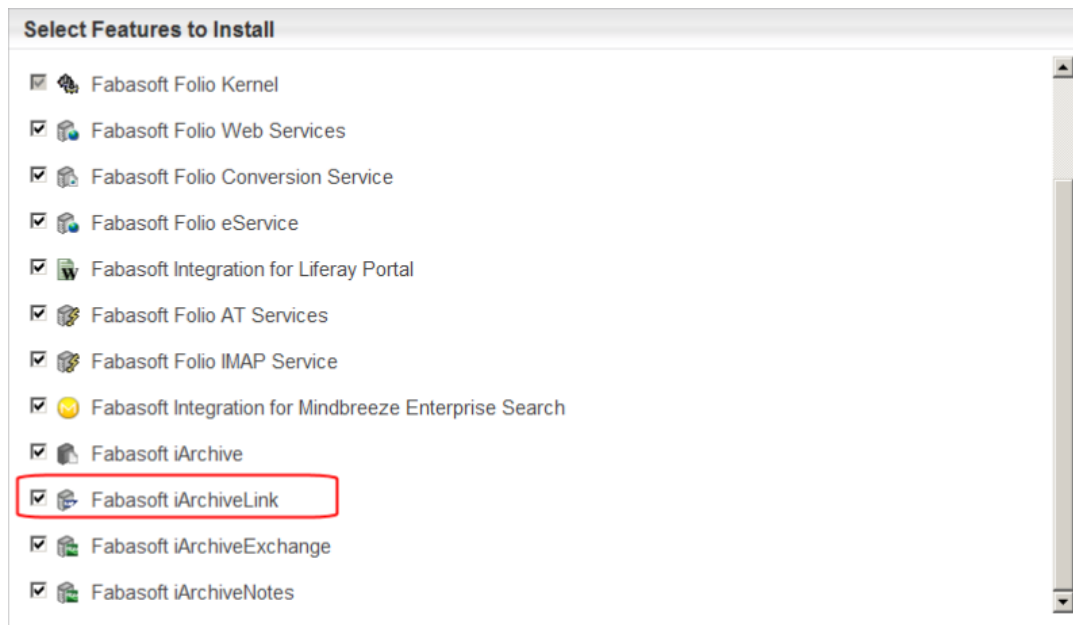

SELinux

If SELinux is enabled, the port on which the iArchiveLink web service is running must be announced to SELinux.

If the default port 17050 was maintained when running the iArchiveLink setup, then this port can be configured for SELinux using the following command:

```
semanage port -a -t fsc_iarchivelink_port_t -p tcp 17050
```


4 Configuration of the SAP System

Fabasoft iArchiveLink can only be used with a well-configured SAP system. The next chapters describe several configuration steps.

4.1 Output Device

First it has to be checked whether an output device for Fabasoft iArchiveLink is configured. If no output device is configured, a new one has to be created. Perform the following steps:

1. Start the transaction "SPAD" and click "Display" next to *Output Devices*.

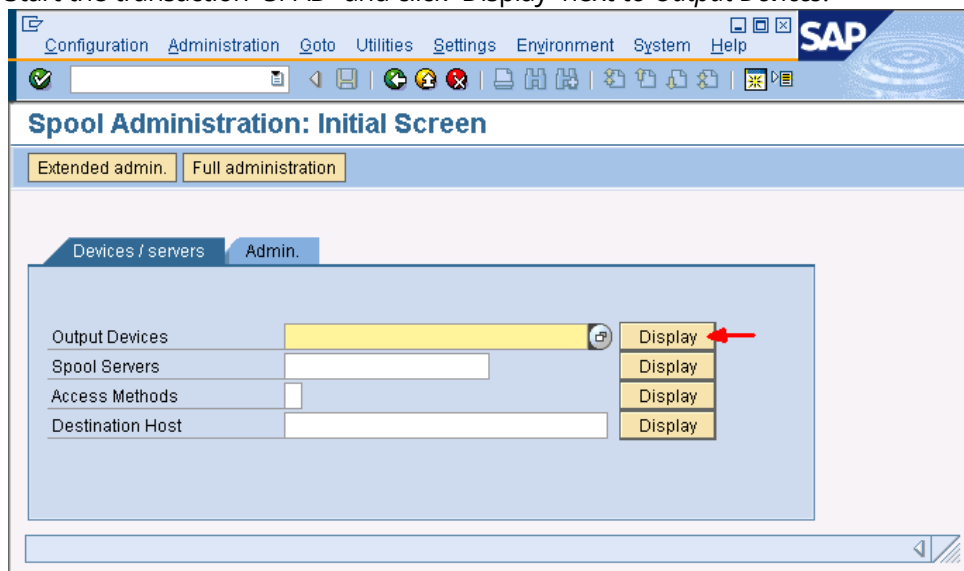

2. If there is no entry with *Dev. type* "ARCHLINK", create a new one.

Dev .	K	Dev. type
ARCH	I	ARCHLINK

3. To switch into edit mode click "Change"  or F8 and then click "Create"  or Shift+F1.

4. Configure the output device on the “DeviceAttributes” tab.

The screenshot shows the 'Spool Administration: Create Output Device' dialog box in SAP. The 'DeviceAttributes' tab is selected. The 'Output Device' field is set to 'ARCH' and the 'Short name' field is empty. The 'Description' field is empty. The 'Device Type' is 'ARCHLINK : SAP ArchiveLink Archiver'. The 'Spool Server' is 'sqsap_TST_00'. The 'Server Description' is empty. The 'Host' is 'sqsap'. The 'Device Class' is 'Archiving program'. The 'Authorization Group' is empty. The 'Model' is empty. The 'Location' is empty. The 'Message' is empty. There is a checkbox for 'Lock Printer in SAP System' which is unchecked.

Click the “Access Method” tab and define the *Host Spool Access Method*.


The screenshot shows the 'Spool Administration: Create Output Device' dialog box in SAP, with the 'Access Method' tab selected. The 'Output Device' field is 'ARCH' and the 'Short name' field is empty. The 'Description' is 'ArchProgram'. The 'Host Spool Access Method' is 'I: Archiving Device'. There is a checkbox for 'Query status through polling' which is unchecked. Below it is a checkbox for 'Do Not Query Host Spooler for Output Status' which is also unchecked.



5. Afterwards click “Save”  to save the changes.


4.2 Content Repository

In SAP the Fabasoft iArchiveLink HTTP content server has to be configured as content repository. Perform the following steps:

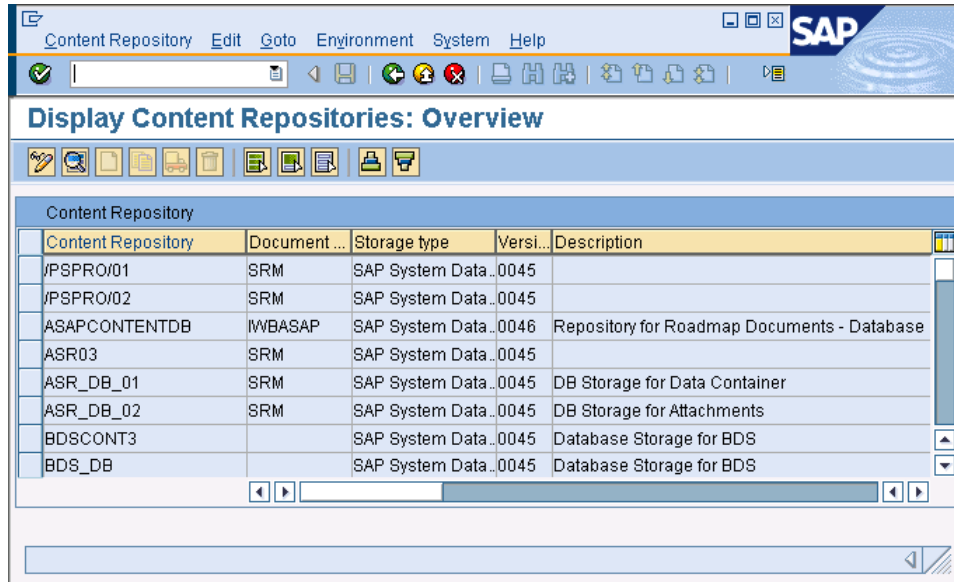


1. Start the transaction "OAC0".

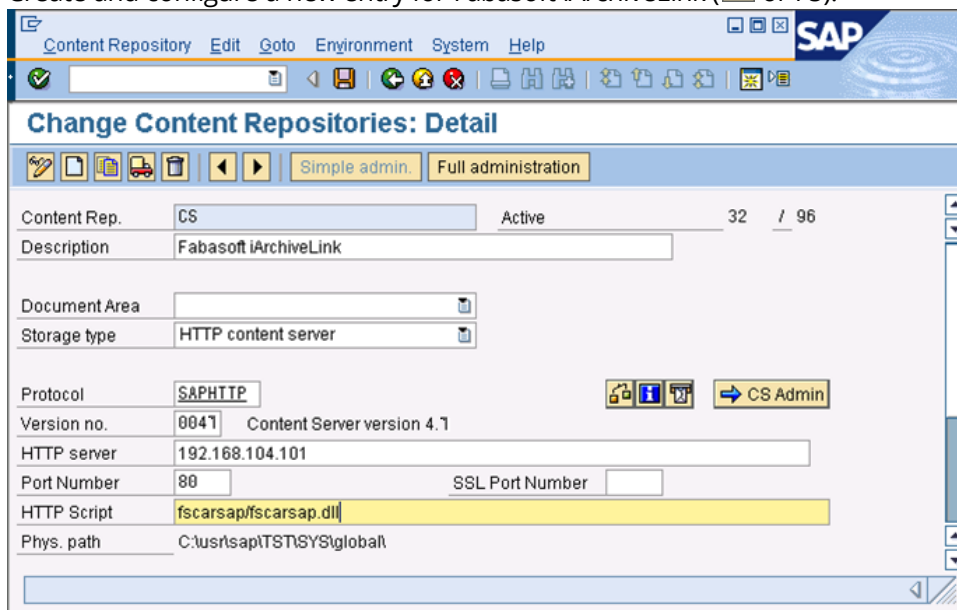

2. To switch into edit mode click "Display/Change" .
3. Create and configure a new entry for Fabasoft iArchiveLink ( or F5).



4. Ensure that you are in "Full administration" mode by using the corresponding buttons.
5. The following options must be configured at least:
 - *HTTP server*
Type the IP address or server name of the Fabasoft iArchiveLink server.
 - *Port Number*
Specify the port on which the Fabasoft iArchiveLink Service is listening (typically in a Microsoft Windows environment: 80 and in a Linux environment: 17050).

- *No Signature*
The checkbox needs to be unchecked.
 - *HTTP Script*
Specify the HTTP script. Type "FSCArSap/fscarsap.dll".
6. Use "Test Connection"  to test the connection between SAP and the Fabasoft iArchiveLink Service.
 7. Click "Send Certificate"  to send the certificate to the Fabasoft iArchiveLink Service.
 8. Click "Exit"  to save the configuration settings.


Note: If one Fabasoft iArchiveLink Service should connect to several SAP systems it is mandatory that each content repository ID is unique and each certificate has a unique common name.

4.3 Document Type

For testing purpose create your own document types. The names of these document types have to start with "Z" (e.g. "ZZPRILIST").

To create a new document type, perform the following steps:


1. Start the transaction "OAC2".
2. Click "New Entries".
3. Specify the settings for the new document type (e.g. FAX, PDF or DOC in the "Document Class" field).

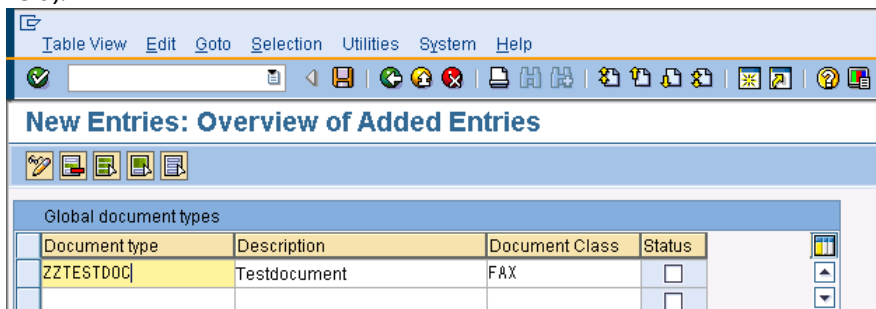


4. Afterwards the document type has to be linked.

4.4 Link for Content Repository


To link a document type, perform the following steps:

1. Start the transaction "OAC3".
2. To switch into edit mode click "Display/Change" .
3. Click "New Entries".

4. Create a new entry for the desired document type.

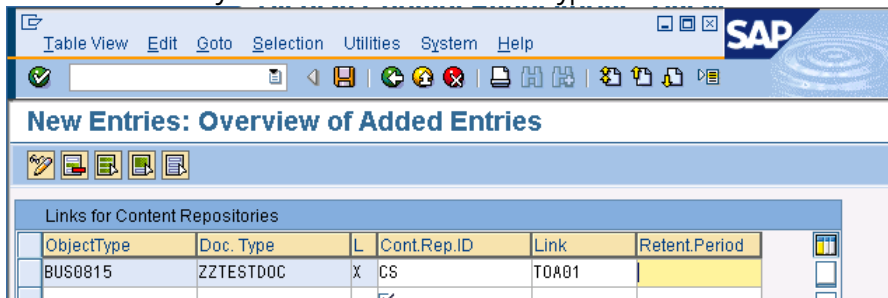

Note: Only links with "L=X" will be active.


5. Click "Save"  to save the configuration.

4.5 Document Type Customizing Wizard

The document type customizing wizard can be used to specify workflow pre-settings for existing document types or new document types created using this wizard.

Perform the following steps:

1. Start the transaction "OAD5".
2. Select the document type created before and click "Continue".

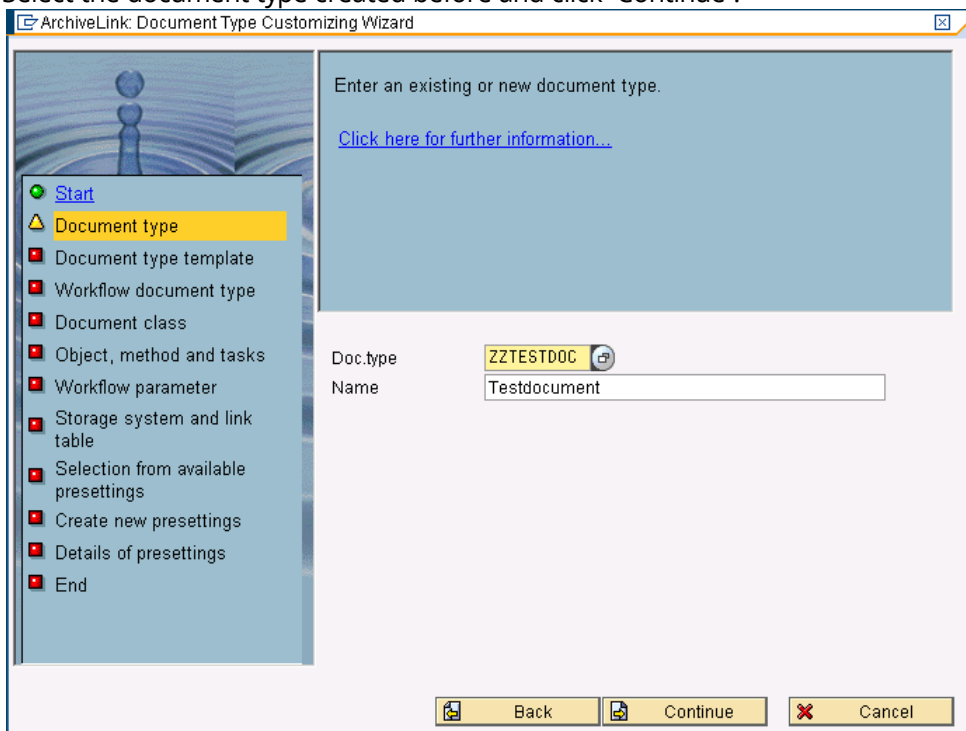

3. Select a document type template and click "Continue".

Note: If no template is selected the default value is incoming invoice.

4. Select the checkbox "Workflow document type" to define workflow pre-settings and click "Continue".

ArchiveLink: Document Type Customizing Wizard

If you also want to perform SAP Business Workflow Customizing, activate the relevant field.

[Click here for further information...](#)

☒ Workflow document type

Back Continue Cancel

5. Specify the object type. Select "CREATE" as entry method and specify the tasks. Afterwards click "Continue".

ArchiveLink: Document Type Customizing Wizard

Specify the object type, the method and the tasks for the storage scenarios.

[Click here for further information...](#)

Obj. type: BUS0015

Name: SAP ARCHIVELINK TEST OBJECT TYPE

Entry

Method	CREATE	CREATE
Task	TS00007869	IMAGEASSIGN
Name	CONFIRM DOCUMENT TYPE/ENTER SAP DOCUMENT	

Assignment

Task	TS00001141	AL_IMPROCLA
Name	ARCHIVELINK: ASSIGN OBJECT TO DOC. TYPE	

Back Continue Cancel

6. Specify the content server and the link table and click “Continue”


The screenshot shows the 'ArchiveLink: Document Type Customizing Wizard' window. The left sidebar contains a list of steps: Start, Document type, Document type template, Workflow document type, Object, method and tasks, Storage system and link table (highlighted with a yellow background), Selection from available presets, Create new presets, Details of presets, and End. The main area has the title 'Specify the content server and the link table.' and a link 'Click here for further information...'. Below this, there are fields for 'Cont.Rep.ID' (with a dropdown showing 'CS'), 'Name' (with text 'Fabasoft iArchiveLink'), 'Link' (with a dropdown showing 'TOA...'), and 'Retention per.' (with an empty text box). At the bottom are 'Back', 'Continue', and 'Cancel' buttons.

7. Select available pre-settings if you want to maintain these. Otherwise click “Continue” without selecting.
8. To create new pre-settings specify a unique ID and the name. Afterwards click “Continue”.

The screenshot shows the 'ArchiveLink: Document Type Customizing Wizard' window. The left sidebar contains a list of steps: Start, Document type, Document type template, Workflow document type, Object, method and tasks, Storage system and link table, Selection from available presets (highlighted with a yellow background), Create new presets, Details of presets, and End. The main area has the title 'Define the default settings that you want to create and maintain.' and a link 'Click here for further information...'. Below this, there is a table with two columns: 'ID' and 'Name'. The first row contains 'CS01' and 'Fabasoft Folio repository'. There are empty rows below it. At the bottom are 'Back', 'Continue', and 'Cancel' buttons.


ID	Name
CS01	Fabasoft Folio repository

9. Define the details of the pre-settings. Select an organizational unit for which these pre-settings will take effect and configure appropriate restrictions. Click "Continue".

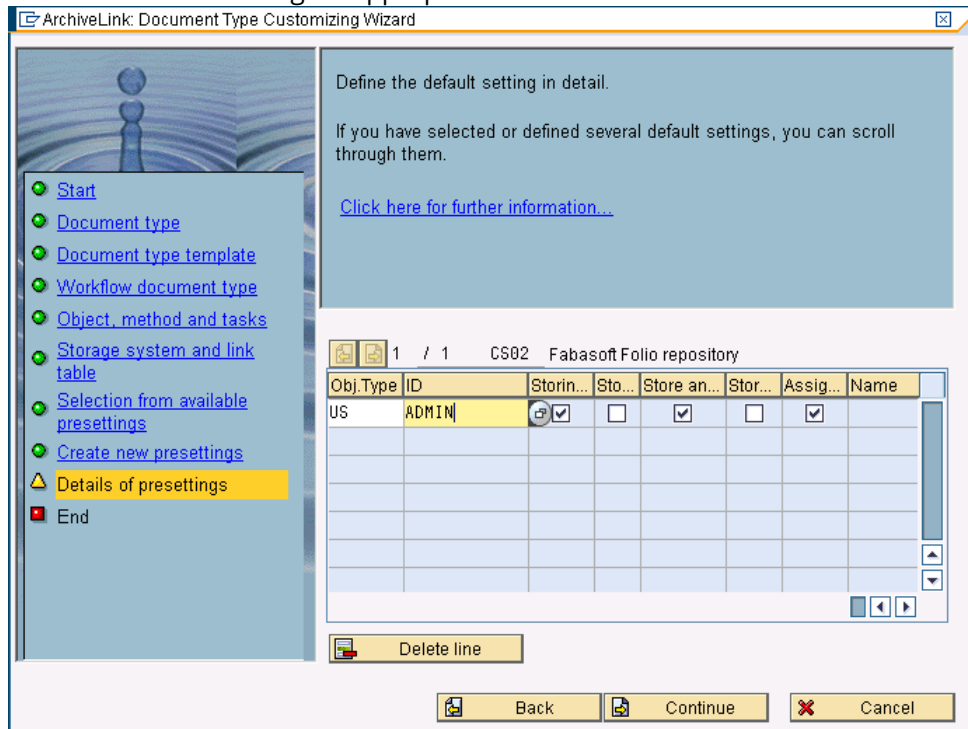

10. Click "Complete" to finalize the configuration.

Note: Start the transaction "OAWD". The pre-settings defined before should be available.

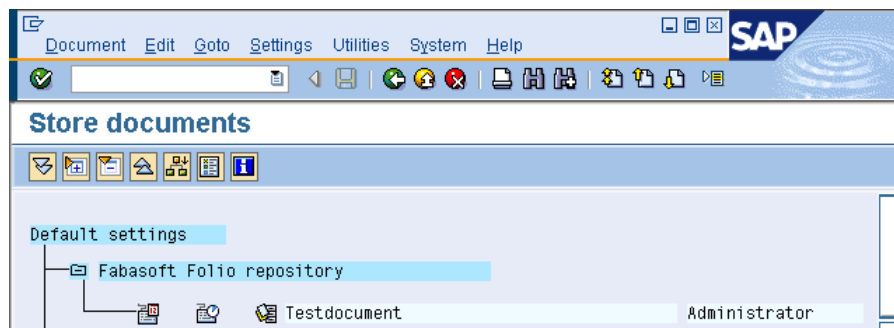


4.6 Configuration of the GUI Integration


To configure the GUI integration, perform the following steps:


1. Start the transaction "OAA3".


2. Double-click "SAPHTTP" to edit this protocol.

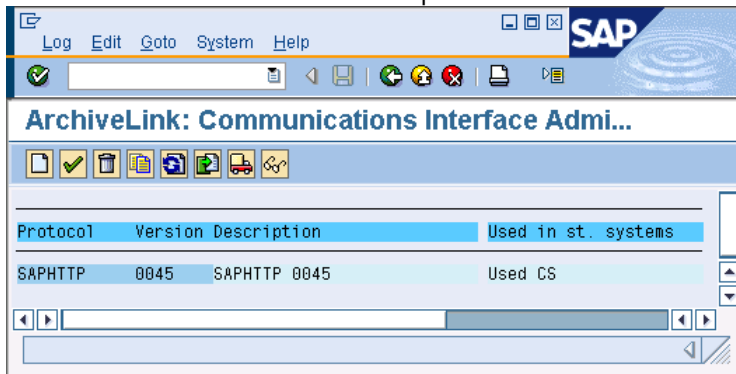

3. Click "Application maintenance".

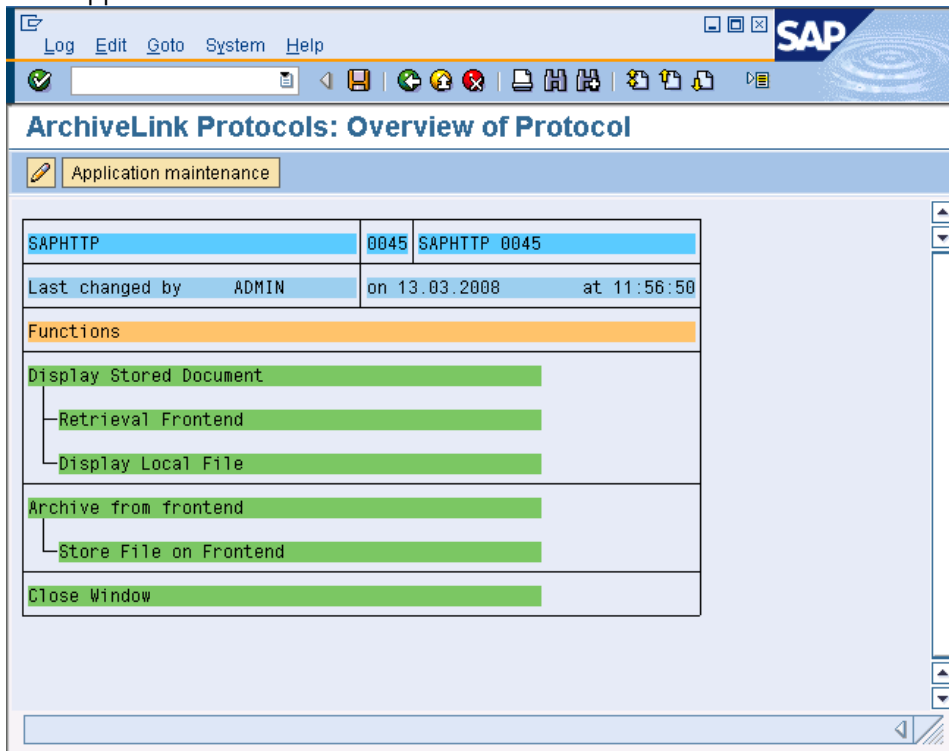

4. Click "Create"  to create a new application.



5. Double-click the new application.

- Double-click "Display Stored Document" and configure the settings of the stored documents. Afterwards click "Back".

Application			FSC.SAPCTRL	Display Stored Document
M	S	G	Command	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	SetArchiveID @AID	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	OpenDocument @DID	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	GetLastErrorMessage = @EID	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>		

☐ Release generated object after call

[Back](#)

Note: In Version 22 you have to replace Application with FOLIOPM22.SAPEXTENSION.

7. Double-click "Archive from Frontend" and configure the settings. Afterwards click "Back".

Application: FSC.SAPCTRL Archive from Frontend


M	S	G	Command
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	SetArchiveID @AID
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	ArchiveDocument = @DID
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	GetLastErrorMessage = @EID
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	


☐ Release generated object after call


[Back](#)


Note: In Version 19 you have to replace Application with FOLIOPM19.SAPEXTENSION.


- Click "Save" to save the settings.
- Click "Back"  twice to switch back to "ArchiveLink Protocols: Overview of Protocol".

10. Double-click “Archive from frontend”. Select a document class that should be maintained and double-click this document class or click “Change” .

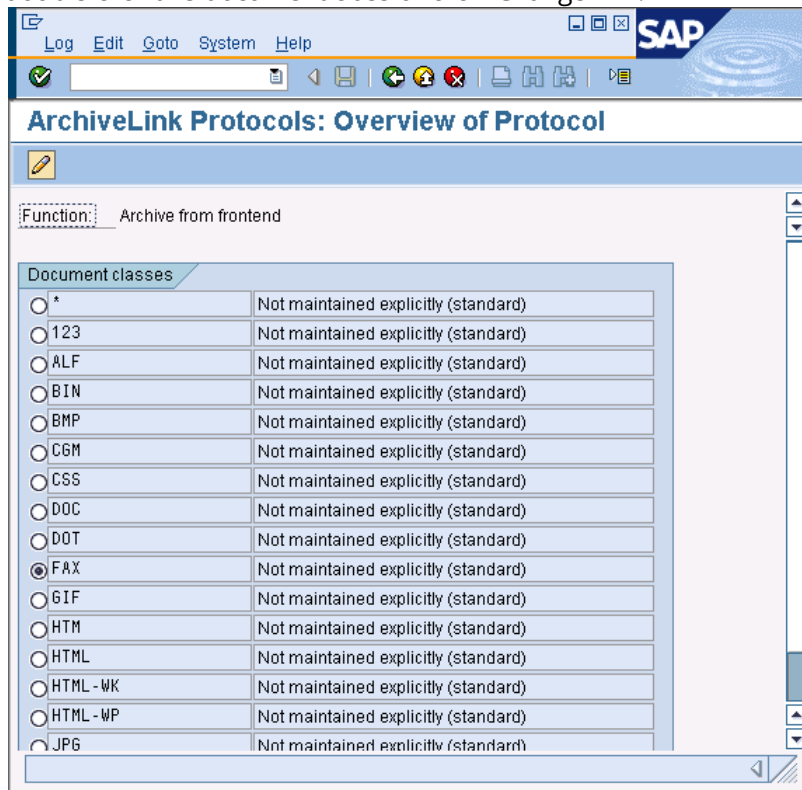

11. Select the communication type “OPEN (OLE)” and the application created before. Click “Continue” .

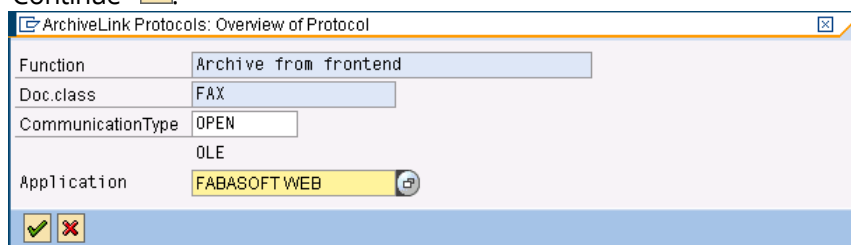




12. Repeat the last two steps for all document classes that should be maintained. Afterwards click “Save” .
13. Double-click “Display Stored Document”. To maintain the stored documents repeat the steps described before to maintain a document class.


4.7 Support of Two Archives


In SAP a document type can only be active for one content repository, but archived contents are also available if the document type is inactive (“LI=X”, see chapter 4.4 “Link for Content Repository”).

To configure a new archive edit the link of a document type, perform the following steps:

1. Create a second content repository. See chapter 4.2 “Content Repository”.
2. Start the transaction “OAC3”.
3. To switch into edit mode click “Display/Change” .

4. Select the line of the link that should be configured to use the new content repository and click "Copy as" . A new line with a copy of the link configuration is created.
5. In the new entry change the "L" property to something different than "X". Click "Continue"  to confirm.
6. In the original entry change the "Cont.Rep.ID" and "Link" properties. Specify the newly created content repository.

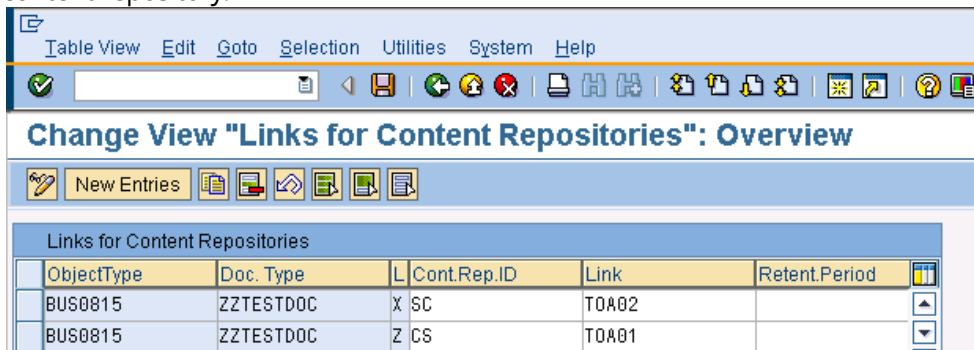

7. Click "Save"  to save the configuration.

5 Importing Certificates

To import a generated certificate (see chapter 4.2 "Content Repository") open a command shell on the server the Fabasoft iArchiveLink Services are executed and perform the following steps:

1. Change to the Fabasoft iArchiveLink installation directory (e.g.: C:\program files\Fabasoft\Components\iArchiveLink (Microsoft Windows) or /opt/fabasoft/bin/ (Linux)).
Note: On Linux platforms run the following commands as fscsrv.
2. Type `fscaradm -DumpPutCert` to display the content of the certificate that was sent by SAP.

```

C:\WINDOWS\system32\cmd.exe
-DumpPutCert -DumpPutCert -AcceptCert <Name> 1

C:\Program Files\Fabasoft\Components\iArchiveLink>Fscaradm.exe -DumpPutCert
List of Provided Certificates <C:\Program Files\Fabasoft\Components\iArchiveLink
\profile\fscarput.pse>:
=====
Certificate 1 (SUMMARY):
subject="CN=ID3"
issuer="CN=ID3"
serialNumber="00"
fingerprint="?"
keyInfo="Algorithm dsaWithSHA1 (OID 1.3.14.3.2.27),
DSA prime p (no. of bits = 520):
0 01242511 CFFA637B 77C9A2C1 330DE790
10 944A6A37 4CEF1618 2C6063AD 535F993E
20 ECD5385C F7F54D42 E3C371A8 6F06895F
30 5DE4AAE3 E17D55E4 FA0572E3 A9F8230D
40 E1
DSA prime q (no. of bits = 168):
0 0149EFD0 1780548F EA49385F 51381338

```

3. Type `fscaradm -AcceptCert "<Subject>"` (e.g.: `fscaradm -AcceptCert "CN=ID3"`) to use this certificate.
4. Type `fscaradm -DumpUseCert` to display the content of the certificate that is in use.

Note: If one Fabasoft iArchiveLink Service should connect to several SAP systems it is mandatory that each certificate has a unique common name.

6 Enable HTTPS Connection Between SAP and the Fabasoft iArchiveLink Service

Optionally, the connection between SAP and the Fabasoft iArchiveLink Service can be configured as HTTPS connection.

Prerequisites

- Fabasoft iArchiveLink is fully configured and working with a HTTP connection.
- A SSL client PSE (Standard) is available in SAP.
For more information about how to create or maintain PSEs, please consult the SAP documentation. Especially the SAP Cryptographic Library is needed for SSL PSEs.
- A certificate and the issuing certificate authority for the Fabasoft iArchiveLink Service.

Tasks

- Enable HTTPS for the Fabasoft iArchiveLink Service.
- Add the certificate authority to the certificate list of the SSL client PSE.
- Configure the content repository to require HTTPS.

6.1 Enable HTTPS for the Fabasoft iArchiveLink Service

If the HTTPS protocol should be used for communication with the Fabasoft iArchiveLink Service, it has to be enabled explicitly.

Microsoft Windows

In a Microsoft Windows environment, HTTPS for the Fabasoft iArchiveLink Service has to be enabled in the Microsoft Internet Information Services. Please consult the third-party documentation for detailed information.

For example, see: <https://docs.microsoft.com/en-us/iis/manage/configuring-security/configuring-ssl-in-iis-manager>

To enable HTTPS in a Microsoft Windows environment, proceed as follows:

1. Open the Internet Information Services Manager.
2. Navigate to the default web site and define a HTTPS binding. Select the prepared certificate that should be used for authenticating the web server.
3. Navigate to the FSCArSap application. Open the SSL settings feature and select *Require SSL*.

Linux

To enable HTTPS in a Linux environment, proceed as follows:

1. Edit the file `/etc/fabasoft/web/ssl.conf`. Uncomment and configure the following lines:

```
SSLEngine on
SSLCertificateFile <path to server certificate>
SSLCertificateKeyFile <path to keyfile>
SSLCACertificateFile <path to ca certificate>
SSLVerifyClient require
SSLVerifyDepth 10
SSLUserName SSL_CLIENT_S_DN_CN
```
2. Edit the file `/etc/fabasoft/web/WebService_<number>.conf`. Replace `<number>` with the number of the Fabasoft Folio Web Service, where the HTTPS protocol should be used for communication.

```
Include /etc/fabasoftware/web/ssl.conf
```

```
Comment or remove other login directives like:
# AuthName "Fabasoft Folio"
# AuthType Basic
# AuthUserFile /etc/fabasoft/web/htpasswd
# AuthGroupFile /etc/fabasoft/web/htgroups
# Require valid-user
```

- ## 6.2 Add the Certificate Authority in SAP

To add the prepared certificate authority in SAP, proceed as follows:

- To do so, start the transaction "SMICM".


The screenshot shows the ICM Monitor application interface. At the top, there is a menu bar with options: List, Edit, Goto, Administration, Settings, System, and Help. Below the menu bar, the 'Administration' menu is open, displaying a list of options: ICM, J2EE Instance (local), J2EE Cluster (global), Leave Emergency Mode, Exit Soft, Exit Hard, Maintenance Mode, Configuration, Start Options, and Restart. The 'Exit Hard' option is highlighted in orange. To the right of the 'Exit Hard' option, a sub-menu is visible with two options: Local and Global. The 'Global' option is also highlighted in orange. The main window of the application shows the 'ICM Monitor' title and a status bar at the bottom indicating 'ICM Status: Running' and 'Restart After Error: true'.

6.3 Configure the Content Repository to Require HTTPS

1. Start the transaction "OAC0".
2. Open the previously defined content repository (see chapter 4.2 "Content Repository").

3. Type "%HTTPS" in the transaction field:

The screenshot shows the SAP 'Change Content Repositories: Detail' transaction. The transaction field at the top contains '%HTTPS'. The main form shows details for Content Repository 'CS' with description 'Fabasoft iArchiveLink'. The 'Storage type' is 'HTTP content server'. The 'Protocol' is 'SAPHTTP'. The 'SSL Port Number' is '443'. At the bottom, the 'HTTPS on frontend' and 'HTTPS on backend' fields are both set to 'HTTPS required', which are highlighted with a red rectangle.

4. Define the SSL port of the Fabasoft iArchiveLink Service and set HTTPS as required for the frontend and backend.
5. Use "Test Connection"  to test the connection between SAP and the Fabasoft iArchiveLink Service.
6. Save the settings.

7 Solution Manager Integration

7.1 SLD-Registration

The environment variable "JAVA_HOME" (path to Java) must be set.

Type `fscaradm -PostSLDREG http://<SLDserver>:<port>/sld/ds <username> <password> [<proxy> <proxy user> <proxy password>]` to register your system.

Example: `fscaradm -postsldreg http://sapserver:50000/sld/ds sldadmin sldpwd)`

The response should look like this (Status: 200, Status-Text: OK):

```
Calling: "C:\Program Files\Java\jre1.6.0_06\bin\java" -cp
"ThirdPartySystemXMLGenerator.jar"
com.sap.lcr.tools.xmlTools.ThirdPartySystemXMLGenerator .
FabasoftiArchiveLink.properties.tmp FabasoftiArchiveLink.template .
FabasoftiArchiveLink.properties.xml
Wed May 07 09:21:25 CEST 2008
ThirdPartySystemXMLGenerator - generates XML Documents to send with the SLDReg.

Returncode = 0
SLDReg XML File successfull created. All variables replaced.

FileUpload - Response Status: 200
FileUpload - Response Status-Text: OK
FileUpload - Response-Text:
```


7.2 Log and Configuration Files

The log and configuration files are placed in <temp-folder>/sapdata/ (e.g.:
C:\WINDOWS\Temp\sapdata (Microsoft Windows) or /tmp/sapdata/ (Linux)).

8 Configuration of the Fabasoft Folio Domain

To configure the Fabasoft Folio Domain, perform the following steps:

1. Open the Fabasoft Folio Web Client.
2. Navigate to the “Domain Administration” and click the “Configuration Objects” tab.

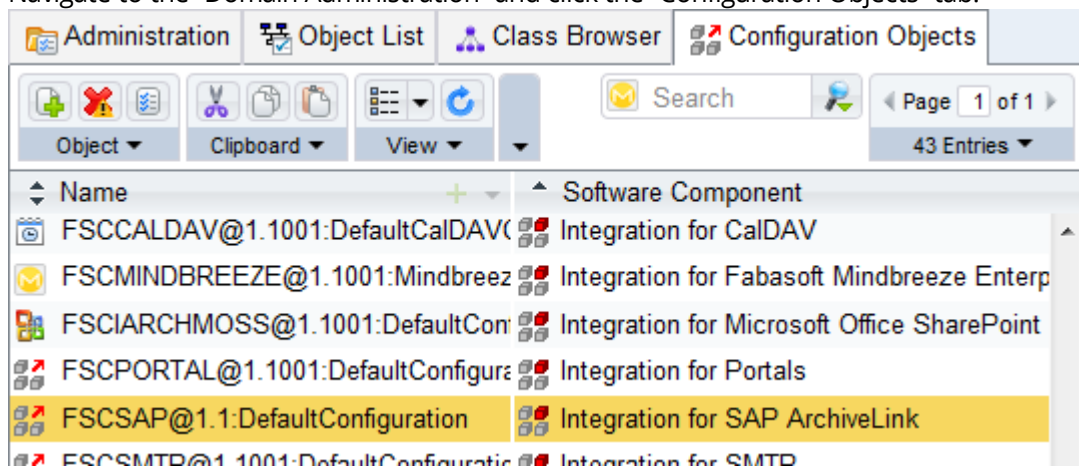

3. Edit the properties of *FSCSAP@1.1:DefaultConfiguration*.

FSCSAP@1.1:DefaultConfiguration (SAP ArchiveLink Configuration): Edit

Buttons: [Refresh] [Help] [Cancel] [Apply] [Next]

Tabs: Object | Versions | Security | Signatures

Sub-tabs: SAP ArchiveLink Configuration | Configuration | Component Object

Content Repository (SAP): CS

Default Protection (SAP): cdur

Archive Contents Automatic: ☐ Undefined

SAP Document Class Mapping for Delivering Barcodes

Buttons: [Add] [Copy] [Paste] [Delete]

One Entry

	Object Class *	SAP Document Class *	Software Component
1	Document	DOC	Integration for SAP

Object Class Mapping for Creating Objects

Buttons: [Add] [Copy] [Paste] [Delete]

No Entries

SAP Content Repositories in Tenants

Buttons: [Add] [Copy] [Paste] [Delete]

No Entries

Tenant *


Content Repository (SAP) *

Network Address Patterns

The following fields are available:

- *Content Repository (SAP)*
This field is used to specify the identification of the SAP content repository. Enter the ID of the content repository defined in chapter 4 "Configuration of the SAP System".
- *Default Protection (SAP)*
The default document protection used for objects connected to SAP ArchiveLink can be defined in this field. "cdur" is selected by default.
 - c Create
 - d Delete
 - u Update
 - r Read
- *Archive Contents Automatically*
This field can be used to define if writing of objects is allowed, that are stored by Fabasoft iArchiveLink into an archive system by using Fabasoft iArchive.
- *SAP Document Class Mapping for Delivering Barcodes*
In this field a mapping for sending barcodes between Fabasoft Folio and SAP content classes can be configured.
 - *Object Class*
This field defines the object class in Fabasoft Folio.

- *SAP Document Class*
The SAP document class can be specified in this field.
 - *Software Component*
This field defines the software component that inserted the mapping.
 - *Object Class Mapping for Creating Objects*
In this field a mapping for newly stored documents between Fabasoft Folio and SAP content classes can be configured.
 - *File Extension*
The extension of the document to store.
 - *Object Class*
This field defines the object class in Fabasoft Folio.
 - *Software Component*
This field defines the software component that inserted the mapping.
 - *SAP Content Repositories in Tenants*
This field allows to configure a mapping between an SAP content repository and Fabasoft Folio Tenant content classes. A list of multi-tenant domains can be specified with IDs of content repositories and an optional list of network addresses.
 - *Tenant*
In this field the Fabasoft Folio Tenant can be defined.
 - *Content Repository (SAP)*
In this field the SAP content repository can be defined.
 - *Network Address Patterns*
In this field the configuration of a network pattern for better separation options is possible.
4. Click "Next" to save the settings.
 5. Make sure, that the configuration object is referenced in the current domain.

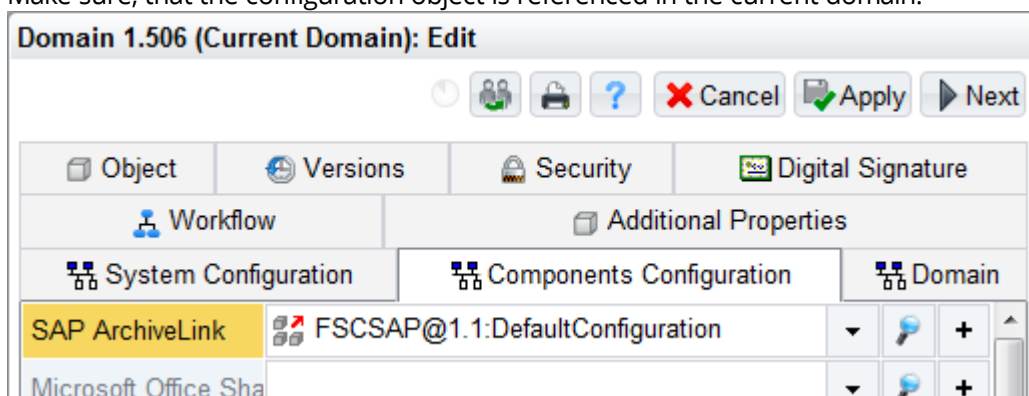

9 Checking the Installation

To check the installation of Fabasoft iArchiveLink HTTP content server perform the following steps:

1. Open a web browser and enter the following URL
<http://<webserver>/FSCArSAP/fscarsap.dll?serverInfo&pVersion>
2. Check the output:



```
serverStatus="running";
serverVendorId="Fabasoft R&D GmbH";
serverVersion="8.0";
```


```


serverBuild="114";
serverTime="09:18:32";
serverDate="2008-04-04";
pVersion="0047";


```

To check the integration of Fabasoft iArchiveLink execute the SAP test SE38. Perform the following steps:


1. Start the transaction "SE38".
2. Type "RSCMST" in the "Program" field and click "Execute" .

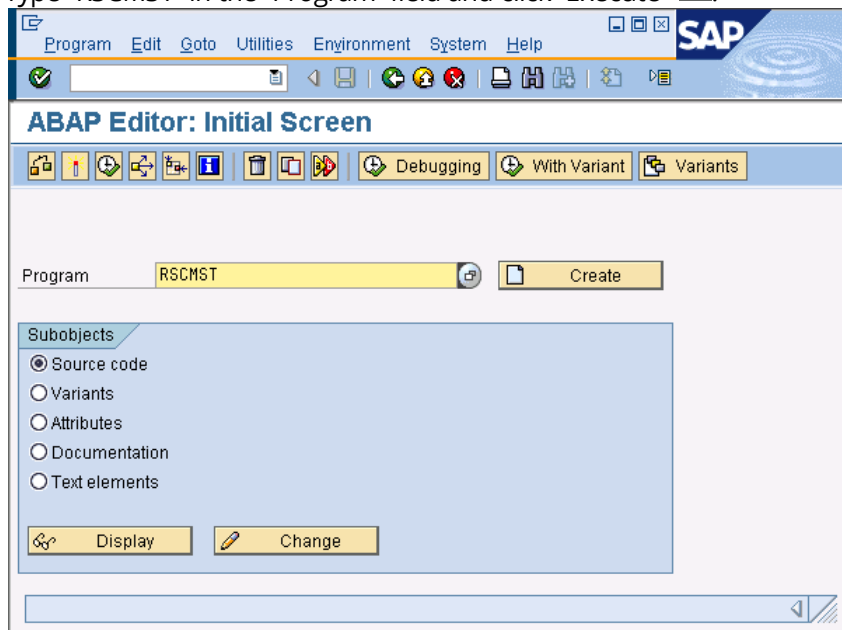

3. Type the ID of the content repository in the "Repository" field and click "Execute" .

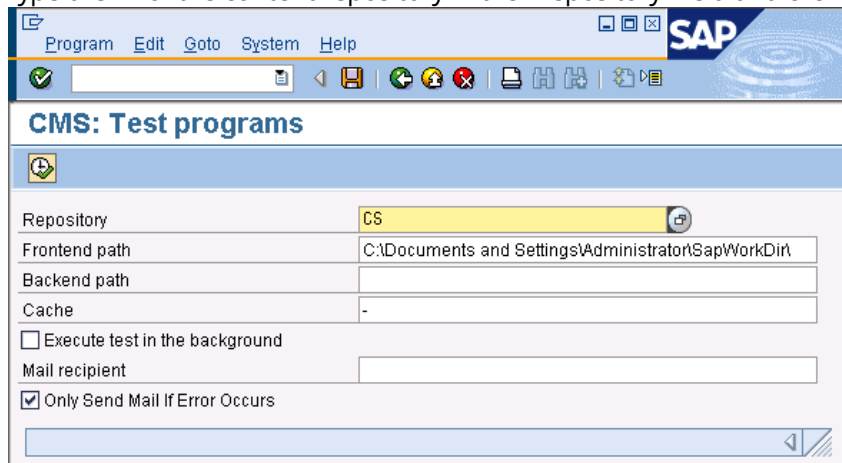

4. Click “Execute All”  to execute all tests.

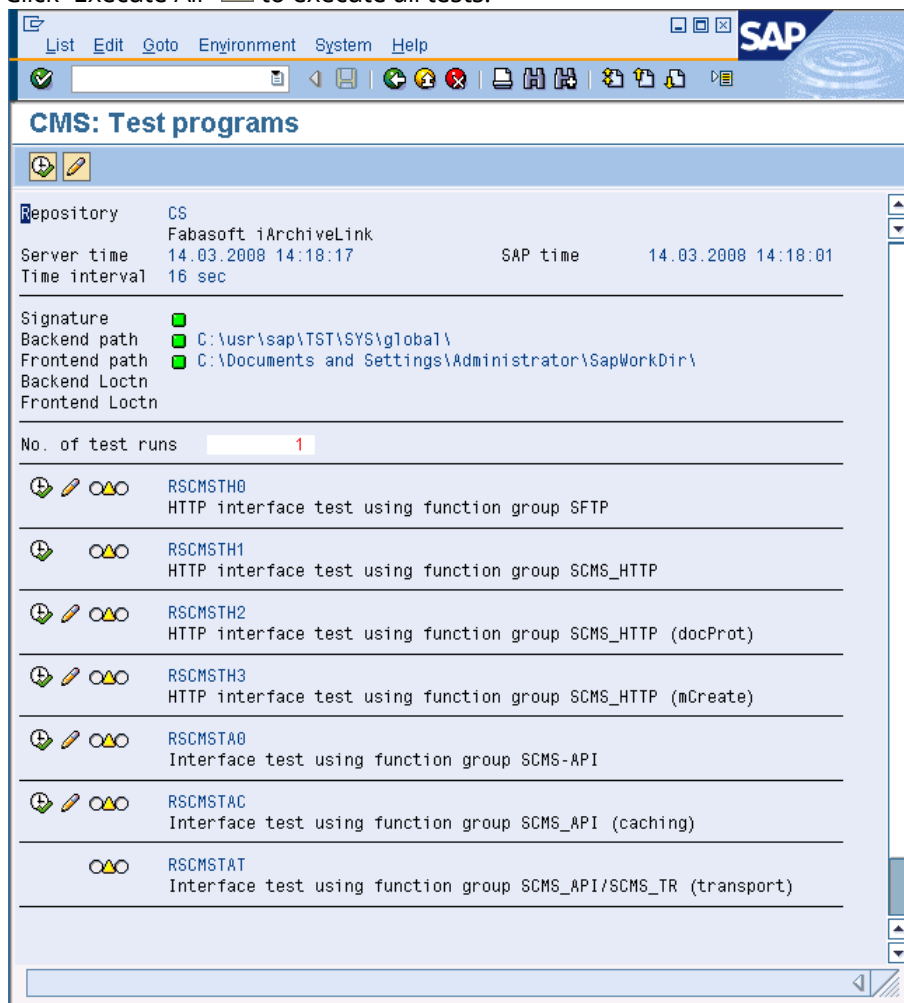

10 Client Configuration

On each device that uses Fabasoft iArchiveLink the SAP Folio Client has to be installed.

Installation prerequisites as described in chapter 2 “Software Requirements”:

- SAPGUI
- Microsoft Visual C++ Redistributable Package

To install the SAP Folio Client, type the following URL in the web browser:

<https://<fscserver>/<fscvdir>/fscasp/content/lib/FolioClientSAP.msi> or execute Setup\ComponentsBase\Client\FolioClientSAP.msi from the Fabasoft installation media.

11 Upgrade Steps for Fabasoft Folio 2016 and Lower

If you want to upgrade Fabasoft Folio version 2016 and lower to Folio 2017 and later you have to perform the following steps before executing the setup:

1. Save the settings of the SAP configuration that is configured in the domain.
2. Open a command shell.

3. Change to the Fabasoft iArchiveLink installation directory (e.g.: `C:\Program Files\Fabasoft\Components\iArchiveLink`).
4. Type `fscaradm -UnregServer`.
5. Uninstall iArchiveLink with the executable (`C:\Program Files\Fabasoft\Components\iArchiveLink`).
6. Execute the Folio setup and update existing components.
7. Execute the Folio setup and install iArchiveLink.
8. Import certificates (see chapter 5 "Importing Certificates").
9. Edit the SAP configuration of your domain.